


ProTec[®] XXL System

Double-width aluminium mobile scaffold


The sturdy ProTec XXL with the extra large platform for more efficient working conditions.

- + TÜV-approved, suitable for a load of 200 kg/m² in accordance with DIN EN 1004
- + Max. working height 12.30 m (outdoors max. 10 m in accordance with DIN EN 1004)
- + Size of platform 2.0 x 1.2 m (length x width); load capacity max. 480 kg
- + Weatherproof and slip-resistant platform
- + The rungs are welded in the centre and therefore are highly resistant to bending
- + Braked, height-adjustable castors for compensating height differences on uneven ground
- + From a working height of 6.30 m, the easy-to-fit outriggers provide extra stability
- + Extremely safe internal ascent due to its non-slip, profiled rungs

i Depending on the configurations additional ballast weights are required (sold separately as accessories). Please see the assembly instructions on our website www.krause-systems.co.uk for more information on the quantity of ballast weights needed.

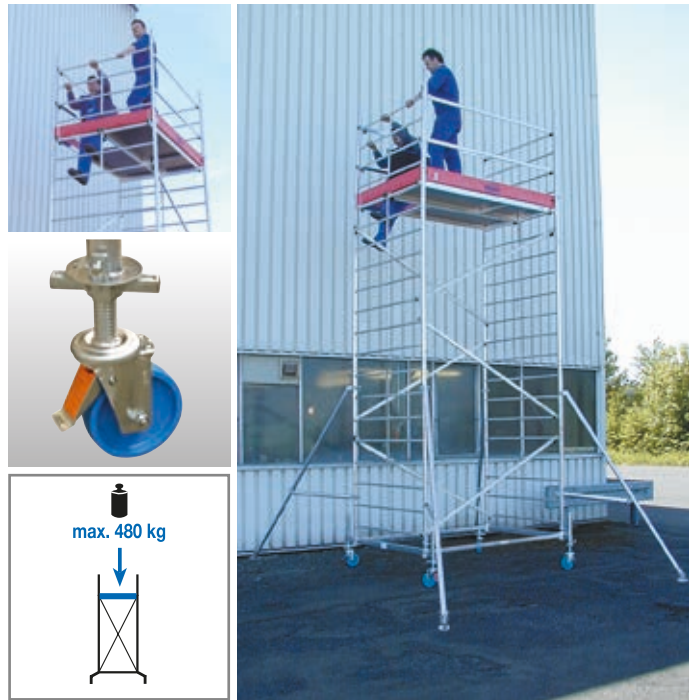

Configurations:

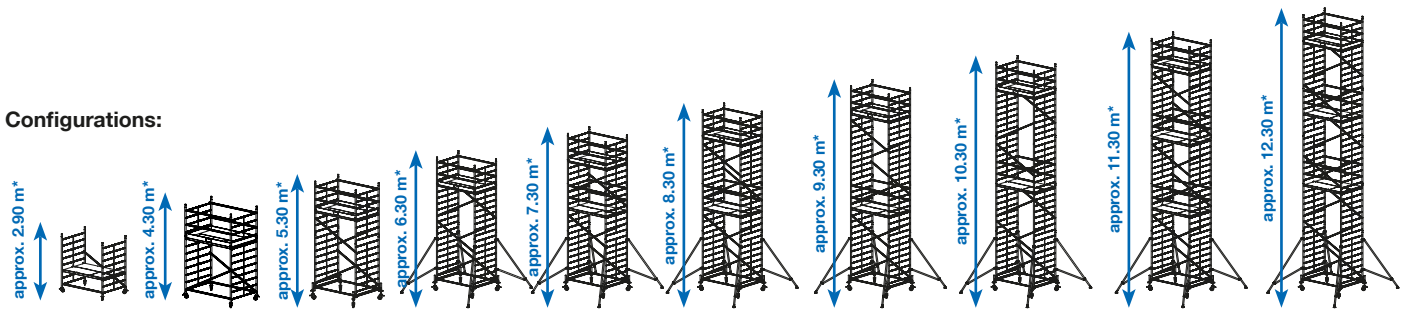

* Working height

	A up to approx.	2.90	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30
B approx.	0.90	2.30	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30
C approx.	2.30	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30
Field length m	2.00										
Field width m	1.40										
Parts list	Art.-No.	911117	911094	911131	911148	911155	911162	911179	911186	911193	911209
Vertical frame 2 m	915078	2	2	3	4	5	6	7	8	9	10
Vertical frame 1 m	915085	-	2	2	2	2	2	2	2	2	2
Platform with hatch 2.00 x 0.60 m	911001	1	1	1	1	2	2	2	2	3	3
Platform without hatch 2.00 x 0.60 m	911018	1	1	1	1	2	2	2	2	3	3
Diagonal brace	912800	1	2	4	6	6	8	8	10	12	14
Rail brace	912206	1	6	4	4	8	8	8	8	12	12
Base brace	912848	-	-	2	2	2	2	2	2	2	2
Stabiliser	914071	-	-	2	2	2	2	2	2	2	2
Outrigger	914095	-	-	-	4	4	4	4	4	4	4
Longitudinal board	913562	-	2	2	2	2	2	2	2	2	2
Transversal board	913517	-	2	2	2	2	2	2	2	2	2
Set of castors Ø 150 mm, height-adjustable	914309	1	1	1	1	1	1	1	1	1	1
Foot plate	914026	4	4	4	4	4	4	4	4	4	4
Gravity pin	704405	4	8	14	16	18	20	22	24	26	28
Floor area approx. m		2.10 x 1.45	2.10 x 1.45	2.10 x 1.80	4.25 x 3.50	4.25 x 3.50	4.25 x 3.50	4.25 x 3.50	4.25 x 3.50	4.25 x 3.50	4.25 x 3.50
Total weight approx. kg		61.0	87.0	119.0	162.0	201.0	212.0	220.0	231.0	272.0	283.0

Accessories/spare parts	Art.-No.	Accessories/spare parts	Art.-No.
Ballast weight 10 kg	704306	Set of stabilisers 1.20 m	910059
Safety set for rail brace/diagonal brace M5 x 65 mm	718914	Set of stabilisers 1.50 m	910066
Safety set for platform M5 x 95 mm	718853	Castor Ø 150 mm, height-adjustable (piece)	914101